


Multi-Function Control Panel

KT-RP8810V - J2



Dimension:
Unit: mm

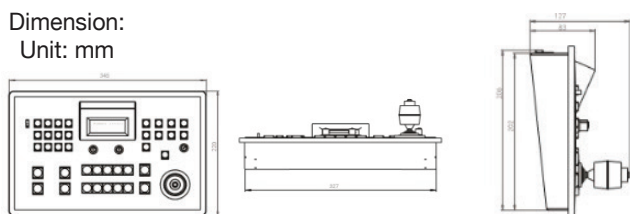

Features:

- Support 10 Pan-Tilt Heads and cameras control.
- Remotely control Camera Function Include GUI.
(Function available depend on the Camera Model)
- Up till 20 Pre-Set for Handheld , Box & Shoulder-mount cameras.

Specification:


Item	KT-RP8810V - J2 (White / Black)
Maximum Control Unit	10
Pre-Set Postions	20 Per Robotic Head
Set Pan-Tilt Limit	Support
Assistant Function	Focus Mode , REC , Track Mode , Wiper , Etc.
Quick Setting	White Balance , Black Balance , RGB Gain Gain (Auto / Manual) , Bar , Shutter , Master Black , GUI Menu. (Function available depending on the Camera Model)
Working Temperature	-10°C ~ 45°C , -40F ~ 113F
Power supply	DC 12V 1200mA
Weight	2.24 Kg , 4.93 Lbs
Dimension	345mm X 220mm X 127mm (W x D x H)
Interface	
RS422	Yes
TCP/IP	Yes

Multi-Function Control Panel With In Built Switcher

KT-RW8804 - J2



Dimension:
Unit: mm

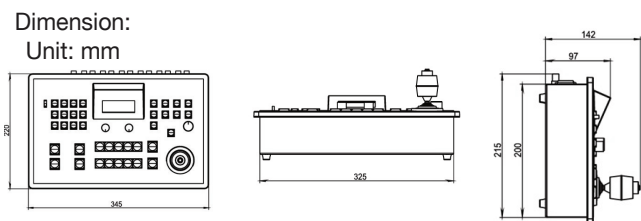

Features:

- In-built Switcher
- Support 4 Pan-Tilt Heads and cameras control.
- Remotely control Camera Function Include GUI.
(Function available depend on the Camera Model)
- Up till 20 Pre-Set for Handheld , Box & Shoulder-mount cameras.

Specification:


Item	KT-RW8804-J2
Maximum Control Unit	4
Pre-Set Postions	20 Per Robotic Head
Set Pan-Tilt Limit	Support
Assistant Function	Focus Mode , REC , Track Mode , Wiper , Etc.
Quick Setting	White Balance , Black Balance , RGB Gain , Gain (Auto / Manual) , Bar , Shutter , Master Black , GUI Menu. (Function available depending on the Camera Model)
Working Temperature	-10°C ~ 45°C , -40F ~ 113F
Power supply	DC 12V 1200mA
Weight	2.8 Kg , 6.17 Lbs
Dimension	345mm X 220mm X 150mm (W x D x H)
Interface	
RS422	Yes
TCP/IP	Yes

Multi-Function Camera Control Panel with Tracing Function

KT-RP8910 - J2



Dimension:
Unit: mm



Features:

- Support 10 Pan-Tilt Heads and cameras control.
- Support Tracing and Pre-Set Timing Adjustment
- Remotely control Camera Function Include GUI.
(Function available depend on the Camera Model)
- Up till 1000 Pre-Set for Handheld , Box & Shoulder-mount cameras.
Max Number of Pre-Set Postions will vary accordingly to Robotic Head Pre-Set Memory,
1000 pre-set postions only apply for KT-PDxx Series.

Specification:


Item	KT-RP8910V - J2
Maximum Control Unit	10
Pre-Set Postions	1000
Adjust Pre-Set Timing	Support
Tracing Function	Support
Set Pan-Tilt Limit	Support
Assistant Function	Focus Mode , REC , Track Mode , Wiper , Etc.
Quick Setting	White Balance , Black Balance , RGB Gain Gain (Auto / Manual) , Bar , Shutter , Master Black , GUI Menu. (Function available depending on the Camera Model)
Working Temperature	-10°C ~ 45°C , -40F ~ 113F
Power supply	DC 12V 3000mA
Weight	3.5 Kg , 7.71 Lbs
Dimension	396mm X 236mm X 131mm (W x D x H)
Interface	
RS422	Yes
TCP/IP	Yes
RS232	Yes * 10 Port
	Yes * 2 Port

Multi-Function Camera Control Panel

KT-RP8705



Dimension:
Unit: mm

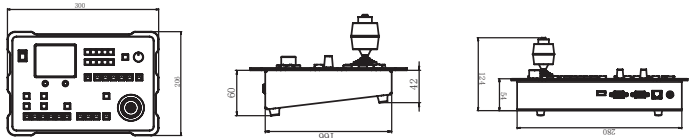

Features:

- Support 5 Pan-Tilt Heads and cameras control.
- Remotely control Camera Function
(Function available depend on the Camera Model)
- Up till 10 Pre-Set for Handheld , Box & Shoulder-mount cameras.

Specification:

Item	KT-RP8705
Maximum Control Unit	5
Pre-Set Postions	10 Per Robotic Head
Set Pan-Tilt Limit	Support
Assistant Function	Focus Mode , REC , Track Mode , Wiper , Etc.
Quick Setting	White Balance Gain (Auto / Manual) (Function available depending on the Camera Model)
Working Temperature	-10°C ~ 45°C , -40F ~ 113F
Power supply	DC 12V 1200mA
Weight	1.6 Kg , 4 Lbs
Dimension	300mm X 206mm X 124mm (W x D x H)
Interface	
RS422	Yes